
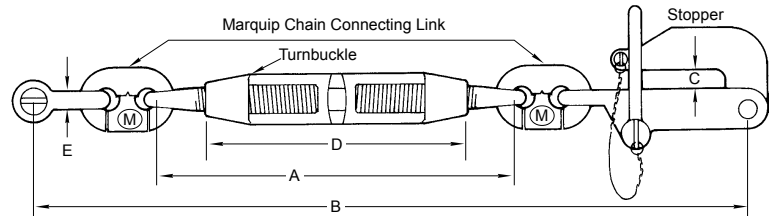


Pelican Hook Chain Stopper

Pelican Hook Chain Stopper (USN drawing 804-860000)

The Pelican Hook Chain Stopper is engineered so that its primary function is to secure the ship's anchor at the hawse pipe. The chain can be disengaged from the stopper by manually deflecting the bail. To facilitate handling, additional handles can be added to the base of the hook should the customer desire. The chain stopper assembly consists of a shackle, chain connecting links, turnbuckle & pelican hook. Each component is forged from fine grain heat treated alloy steel, with a minimum tensile strength of 150,000 psi.

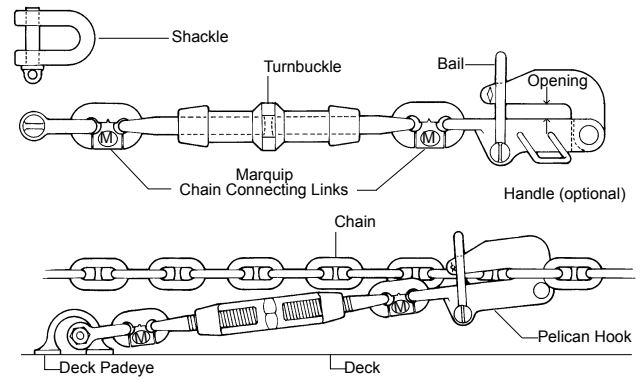

Chain Size Inches	MM	A	B MIN.	B MAX.	C	D	E	DET. LINK SIZE	PROOF LOAD (lbs.)	BREAK LOAD (lbs.)
3/4	19	16	33-1/4	40-1/2	1	11	7/8	3/4	67,500	91,100
7/8	22	17-1/4	38-7/16	45-9/16	1-7/32	11	1	7/8	88,200	119,000
1 - 1-1/8	25 - 29	19-1/2	46-7/8	55-1/2	1-17/32	13	1-1/8	1-1/8	145,000	195,000
1-1/4	32	19-5/8	48	56-5/8	1-17/32	13	1-1/4	1-1/4	178,200	240,600
1-1/4HS - 1-1/2	32HS - 38	23-3/4	55-3/16	65-11/16	1-3/4	16	1-1/2	1-3/8	211,500	285,500
1-3/8HS - 1-5/8	34HS - 42	23-3/4	55-3/16	65-11/16	2	16	1-1/2	1-3/8	211,500	285,500
1-5/8HS - 2	42HS - 51	24-1/8	59-3/16	69-11/16	2-7/16	16	1-1/2	1-1/2	252,000	340,200
2-1/8 - 2-3/8	54 - 60	26-1/4	65-5/8	76-1/8	2-9/16	16	1-5/8	1-1/2	252,000	340,200
2-1/2 - 2-5/8	64 - 67	29-3/4	74-3/8	87-1/2	3-1/8	20	1-7/8	1-5/8	292,500	395,000
2-3/4 - 2-3/4HD	70 - 70HD	29-3/4	86-5/8	89-3/4	3-1/8	20	1-7/8	1-3/4	352,000	476,000
3HD - 3-1/4	76HD - 83	36	90-3/4	106-1/2	3-3/4	24	2-3/8	2-1/4	403,000	610,000
3-3/8 - 3-1/2	86 - 89	38-5/8	97-7/16	113-1/16	3-7/8	24	2-5/8	2-1/2	492,000	744,000
3-1/2HD - 3-3/4	89HD - 95	44-3/8	110	128-1/8	4-1/2	27-1/2	2-7/8	3	706,000	1,068,000
4-3/4	121	44-3/8	130-5/8	147-5/8	5-3/8	27-1/2	2-7/8	3	706,000	1,068,000

HD=Heavy Duty Chain

HS=High Strength Chain

All dimensions are in inches and are subject to change.

