
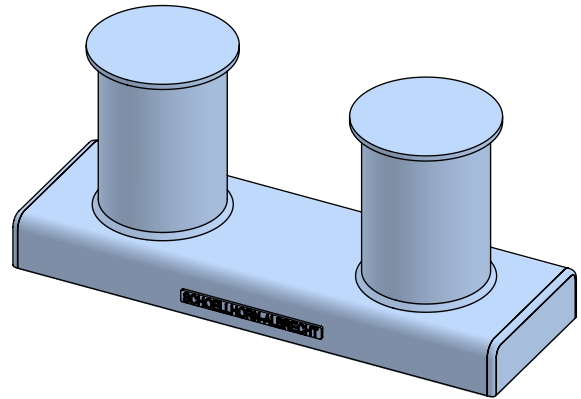


Double Bitts

ISO3913 Double Bitt

- Custom Coatings Available
- Custom Materials Available
- Safe Working Load Determined by ISO3913 Specification

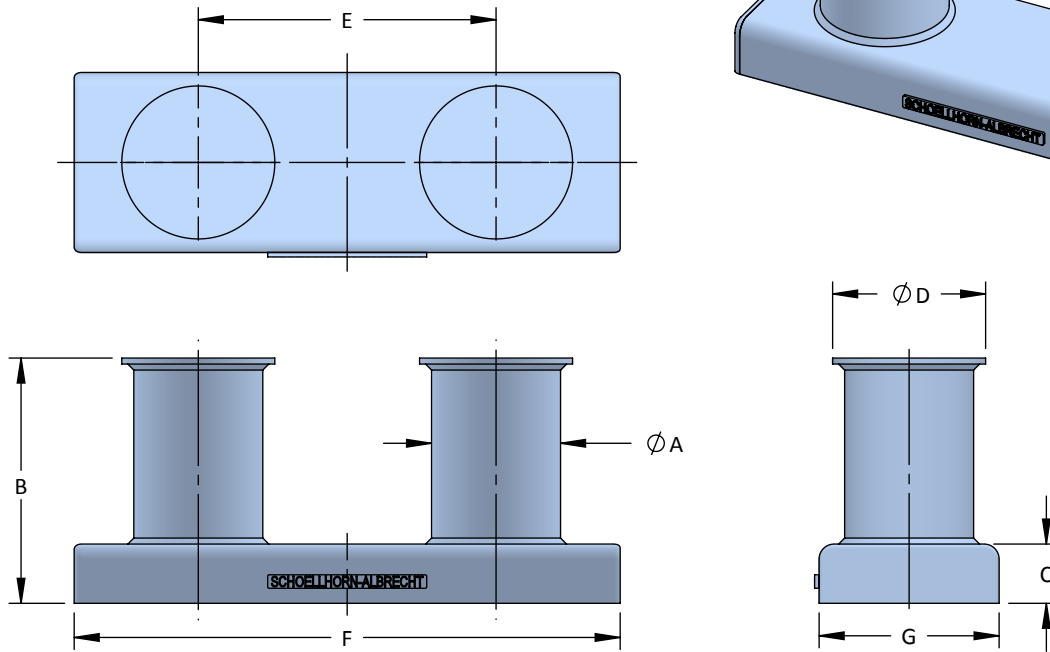

Model No.	Safe Working Load per Bitt (Metric Tons)	Nominal Size	A	B	C	D	E	F	G
ISO3913-D070	1	2 1/2	2 7/8	5 15/16	1 9/16	3 1/2	6 7/8	12 1/4	5 5/16
ISO3913-D090	2	3	3 1/2	7 7/16	1 15/16	4 5/16	9 7/16	15 3/4	5 3/4
ISO3913-D100	3	4	4 1/2	9 3/16	2 15/16	5 1/2	9 7/8	17 3/4	6 7/8
ISO3913-D125	4	5	5 9/16	11	3 1/8	6 3/4	12 1/2	22	8
ISO3913-D160	5	6	6 5/8	13 13/16	3 9/16	7 7/8	15 3/4	28 1/2	10
ISO3913-D200	8	8	8 5/8	16 3/16	3 15/16	10 1/2	19 1/2	35 1/2	12
ISO3913-D250	12	10	10 3/4	20 7/16	4 15/16	12 3/4	24 13/16	45 1/2	15
ISO3913-D315	20	12	12 3/4	25 7/16	5 15/16	15 1/2	31 1/2	56 1/2	19
ISO3913-D400	32	16	16	31 7/16	6 15/16	19 3/4	39 1/2	71 1/2	23 3/4
ISO3913-D500	46	20	20	38 1/4	7 7/8	24 1/2	49 1/4	88 1/2	29 1/2

All dimensions are in inches and are subject to change.

