


Single Bitts

ISO13799, Rev. -, Recessed Shell Bitt

- Custom Coatings Available
- Custom Materials Available

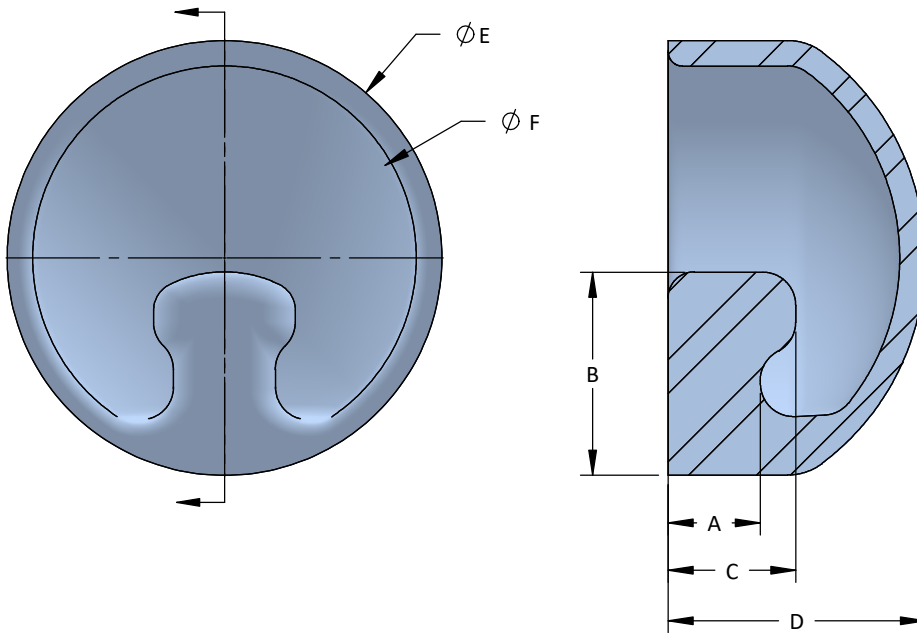

Model No.	SIZE A	B	C	D	E	F	SWL Metric Tonne
ISO13799-850-75	180	400	250	500	850	750	75
ISO13799-850-110							110
ISO13799-850-135							135
ISO13799-920-100	195	430	270	544	920	812	100
ISO13799-920-150							150
ISO13799-920-180							180

*The SWL is the maximum applicable rope tension. (SWL is for reference only)

**SWL's Listed are for Grade 36 ksi, 50 ksi & 65 ksi Yield.

***Materials as Called Out in ISO13799

All dimensions are in millimeters and are subject to change.

