
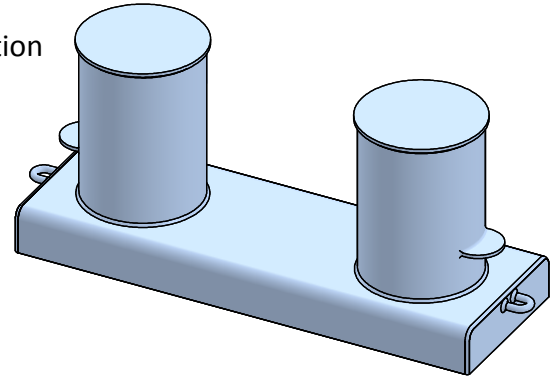


Double Bitts

ISO 13795 - TYPE B - Wide Base

- Custom Coatings Available
- Custom Materials Available
- Safe Working Load Determined by ISO-13795 Type B Specification

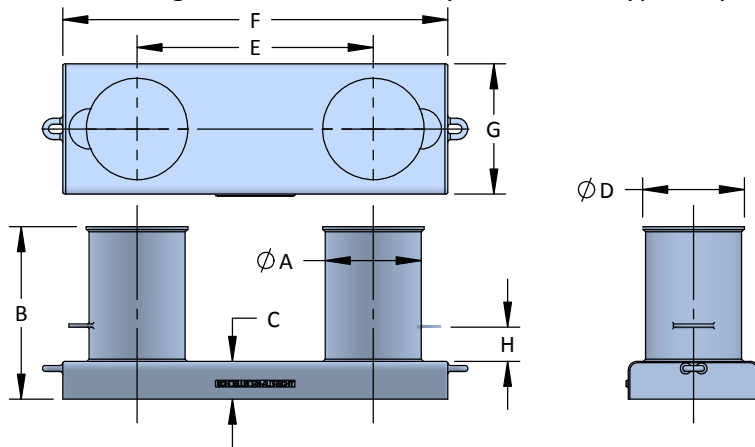

Model No.	SWL			Nominal Size	A	B	C	D	E	F	G	H
	For mooring purposes (Figure-of-eight belay)		For towing purposes (Eye Splice)									
	One-rope use	Two-rope use										
	Metric Tons	Metric Tons	Metric Tons									
ISO13795-150-TYPE B	5.5	5	10	6	6 ⁵ / ₈	12 ⁵ / ₈	3 ¹ / ₈	7 ⁵ / ₁₆	15 ³ / ₄	26 ³ / ₈	8 ⁷ / ₈	2 ³ / ₄
ISO13795-200-TYPE B	8.4	6.7	13	8	8 ⁵ / ₈	14 ³ / ₈	3 ³ / ₈	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	33 ⁷ / ₈	11 ⁷ / ₁₆	2 ³ / ₄
ISO13795-250A-TYPE B	16	14	27	10	10 ³ / ₄	18 ¹ / ₂	3 ¹⁵ / ₁₆	11 ⁷ / ₁₆	24 ¹³ / ₁₆	41 ¹⁵ / ₁₆	14 ³ / ₁₆	3 ⁹ / ₁₆
ISO13795-250B-TYPE B	13	11	22	10	10 ³ / ₄	18 ¹ / ₂	3 ¹⁵ / ₁₆	11 ⁷ / ₁₆	24 ¹³ / ₁₆	41 ¹⁵ / ₁₆	14 ³ / ₁₆	3 ⁹ / ₁₆
ISO13795-300A-TYPE B	34	31	62	12	12 ³ / ₄	22 ⁵ / ₈	4 ¹⁵ / ₁₆	13 ³ / ₈	31 ¹ / ₂	51 ³ / ₁₆	16 ¹⁵ / ₁₆	4 ⁵ / ₁₆
ISO13795-300B-TYPE B	19	16	36	12	12 ³ / ₄	22 ⁵ / ₈	4 ¹⁵ / ₁₆	13 ³ / ₈	31 ¹ / ₂	51 ³ / ₁₆	16 ¹⁵ / ₁₆	4 ⁵ / ₁₆
ISO13795-350A-TYPE B	45	43	85	14	14	25 ¹³ / ₁₆	5 ¹¹ / ₁₆	14 ¹⁵ / ₁₆	35 ³ / ₁₆	58 ¹ / ₁₆	18 ⁷ / ₈	5 ¹ / ₈
ISO13795-350B-TYPE B	25	22	50	14	14	25 ¹³ / ₁₆	5 ¹¹ / ₁₆	14 ¹⁵ / ₁₆	35 ³ / ₁₆	58 ¹ / ₁₆	18 ⁷ / ₈	5 ¹ / ₈
ISO13795-400A-TYPE B	61	53	106	16	16	27 ³ / ₄	6 ⁵ / ₁₆	16 ¹⁵ / ₁₆	39 ³ / ₈	64 ³ / ₁₆	21 ⁵ / ₈	5 ¹¹ / ₁₆
ISO13795-400B-TYPE B	33	27	67	16	16	27 ³ / ₄	6 ⁵ / ₁₆	16 ¹⁵ / ₁₆	39 ³ / ₈	64 ³ / ₁₆	21 ⁵ / ₈	5 ¹¹ / ₁₆
ISO13795-450A-TYPE B	77	62	124	18	18	29 ⁵ / ₁₆	6 ¹¹ / ₁₆	18 ⁷ / ₈	43 ⁵ / ₁₆	71 ¹ / ₄	24 ⁷ / ₁₆	6 ⁵ / ₁₆
ISO13795-450B-TYPE B	39	30	78	18	18	29 ⁵ / ₁₆	6 ¹¹ / ₁₆	18 ⁷ / ₈	43 ⁵ / ₁₆	71 ¹ / ₄	24 ⁷ / ₁₆	6 ⁵ / ₁₆
ISO13795-500A-TYPE B	101	77	154	20	20	31 ¹ / ₈	7 ¹ / ₂	20 ⁷ / ₈	49 ³ / ₁₆	80 ⁵ / ₁₆	27 ³ / ₁₆	7 ⁷ / ₈
ISO13795-500B-TYPE B	47	33	93	20	20	31 ¹ / ₈	7 ¹ / ₂	20 ⁷ / ₈	49 ³ / ₁₆	80 ⁵ / ₁₆	27 ³ / ₁₆	7 ⁷ / ₈
ISO13795-550A-TYPE B	115	83	165	22	22	33 ¹ / ₁₆	8 ¹ / ₄	22 ¹³ / ₁₆	54 ³ / ₁₆	88 ³ / ₁₆	29 ¹ / ₂	7 ⁷ / ₈
ISO13795-550B-TYPE B	80	55	159	22	22	33 ¹ / ₁₆	8 ¹ / ₄	22 ¹³ / ₁₆	54 ³ / ₁₆	88 ³ / ₁₆	29 ¹ / ₂	7 ⁷ / ₈
ISO13795-600-TYPE B	143	97	193	24	24	34 ⁷ / ₁₆	8 ⁷ / ₈	24 ¹³ / ₁₆	61	98 ¹ / ₁₆	32 ⁵ / ₁₆	7 ⁷ / ₈

All dimensions are in inches and are subject to change.

